

# SEDAN-EM

EMERGENCY



Light in excellent form





## سدان اضطراری LED



**SEDAN-EM**  
**EMERGENCY**



CODE	MADULE (w)	Converter	Battery	W (Kg)
ISE-EM117012-1SA	12 w LED	---	---	2.0
ISE-EM117003-1SA	Emergency Mode: 3 w LED	Non-Maintained	3.6 v	2.1
ISE-EM117010-1SA	Emergency Mode: 10 w LED	Maintained	3.6 v	2.1
ISE-EM117012-2SA	12 w LED	---	---	2.0
ISE-EM117003-2SA	Emergency Mode: 3 w LED	Non-Maintained	3.6 v	2.1
ISE-EM117010-2SA	Emergency Mode: 10 w LED	Maintained	3.6 v	2.1
ISE-EM317012-2SA	12 w LED	---	---	2.1
ISE-EM317003-2SA	Emergency Mode: 3 w LED	Non-Maintained	3.6 v	2.2
ISE-EM317010-2SA	Emergency Mode: 10 w LED	Maintained	3.6 v	2.2
ISE-EM117009-1SA	Emergency Mode: 9 w LED	Non-Maintained	3.6 v	2.1

**Sedan-EM**

**APPLICATION:**  
Emergency lighting and exit route


**TECHNICAL DATA:**  
**BODY**  
The housing made of cold rolled steel sheet with white powder coated.

**DIFFUSER**  
Glare resistance (Anti-glare) in the polystyrene diffuser versions(Anti UV)


**ELECTRICAL COMPONENTS**  
Lifetime 50,000h / L80B10  
Driver on board led module  
CRI > 80  
SDCM < 3  
Maintained and Non-maintained electronic converter for exit route  
Li-Ion battery  
Rated duration: 3h  
3-pole polycarbonate terminal block without tool requirement  
Environment friendly

**INGRESS PROTECTION**  
IP: 43

**MOUNTING BRACKET**  
Surface mounting bracket to ceiling and wall  
Suspension mounting bracket



IP 43	220-240V 50-60HZ	CR1<80	EMERGENCY
LOOPING	3 SDCM	UGR <19	
ECG			
Flicker Free			

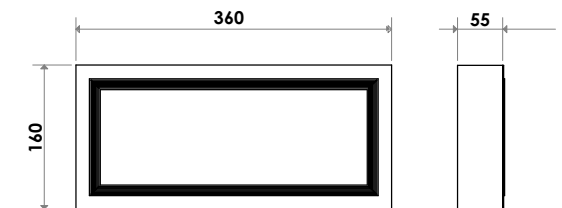

**Accessories**



براکت آویز

**تجهیزات جانبی**

